

LED WALL RACKS



FEATURES

- System Light Efficacy 90 LPW
- Easy Installation & Maintenance
- IP65
- Five Years Warranty
- Optional Shade Included for Field Installation
- ETL Part Number: PLTE111X
DLC Part Number: PLTE1112




50% ENERGY EFFICIENCY & LONG LIFE
60% MORE ENERGY EFFICIENT THAN STANDARD HID LAMPS
TYPICAL PAYBACK OF 1 - 3 YEARS


SKU #	Kelvin	Lumens	CRI	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
-------	--------	--------	-----	---------	---------	------	----------	------------	----------

PLT-10831	5000	3600	80	40	120-277	YES	WALL	54000	5 years
-----------	------	------	----	----	---------	-----	------	-------	---------

ADDITIONAL PHOTOS



THREADED CONDUIT HOLES
ELECTRICAL BOX MOUNTING HOLES



LEDs



MOUNTING BRACKET

FEATURES

- Easy Installation & Maintenance
- System Light Efficacy 90 LPW
- Optional Shade Included for Field Installation

SPECIFICATIONS

PERFORMANCE

3600 Lumen Output (IES)
 40W Power Consumption
 90lm/W Efficacy (IES)
 5000K Color Temperature
 ≥80 CRI
 L70>54,000 hours Lumen Maintenance
 100-277 Input Voltage
 0.95 Power Factor

TYPICAL APPLICATIONS

- Security Lighting
- Pedestrian Lighting

ENVIRONMENTAL

IP65 Rating
 -30 to 45°C Operating Temperature

WARRANTY


PHYSICAL

Dimensions (14in x 8.5in x 7.1in)
 Weight 10.4lb
 Wall Mounting Options
 Fixture Material Aluminum Alloy


WARRANTY **5 Years**



PHOTOMETRICS

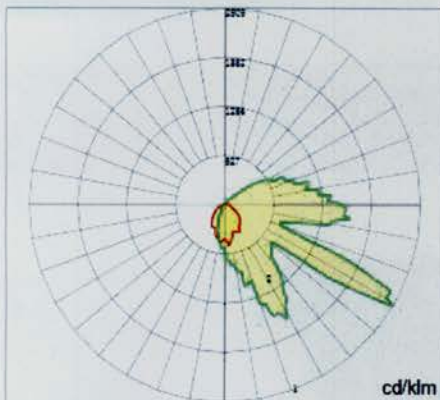

0.0~180.0

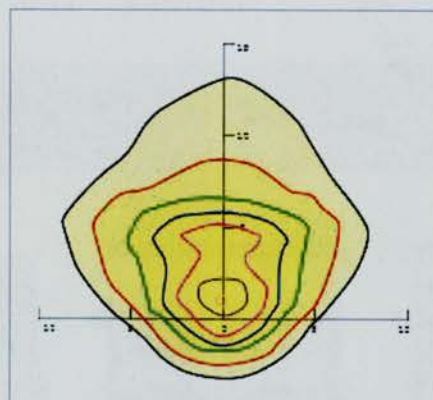

Mounting Hight 4m, 0 Tilt,
 50LUX-5LUX

Illumination

Height	Light Spot	LUX
2m	0.5×3.2m	142LUX
4m	0.9×6.4m	35.5LUX
6m	1.4×9.6m	15.8LUX
8m	1.8×12.8m	8.9LUX
10m	2.3×16.1m	5.7LUX